

BR700ELCD/BR1000ELCD
BR1200ELCD



DESKTOP UPS WITH LCD DISPLAY



Line-interactive
UPS Topology



Energy Saving
Technology



Automatic Voltage
Regulation (AVR)



USB Charging
Port(s)



Surge and Spike
Protection



PowerPanel
Management
Software

The GreenPower UPS with multifunction LCD readout, providing immediate access to power information


Perfect for home and office applications, the BRICS LCD Series is a compact UPS which adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The products' multifunction LCD readout clearly displays information of power and battery conditions. This series also features a cable collector and wall-mount design, allowing you to maintain a tidy and flexible workspace.

SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Simulated Sine Wave Output
- Automatic Voltage Regulation (AVR)
- USB Charging Port(s)
- Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- LCD Status Display
- PowerPanel Management Software
- Wall Mount Installation

PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button
5. Battery Backup & Surge Protected Outlets
6. Communication Protection Ports RJ11/RJ45
7. USB Charging Ports
8. Surge Protected Outlets
9. Cable Collector
10. AC Input Power Cord
11. Input Circuit Breaker
12. USB Port

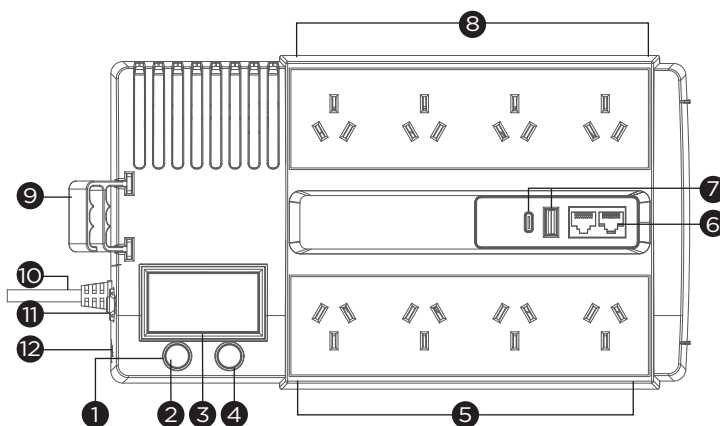

BR700/1000/1200ELCD



TECHNICAL SPECIFICATIONS

Model Name	BR700ELCD		BR1000ELCD	BR1200ELCD
General				
UPS Topology	Line-interactive			
Energy Saving Technology	GreenPower UPS™ Bypass Technology			
Input				
Nominal Input Voltage (Vac)	230 ± 10%			
Input Voltage Range (Vac)	167 - 295			
Input Frequency (Hz)	50, 60			
Input Frequency Detection	Auto-sensing			
Rated Input Current (A)	3.17	4.46		5.51
Input Connector Type	AU			
Output				
Capacity (VA)	700	1000		1200
Capacity (Watts)	420	600		720
On Battery Waveform	Simulated Sine Wave			
On Battery Voltage(s) (Vac)	230 ± 10%			
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%			
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck			
Overload Protection	Internal Current Limiting, Circuit Breaker			
Outlet(s) - Total	8			
Outlet Type	AU x 8			
Outlet(s) - Battery & Surge Protected	4			
Outlet(s) - Surge-Only Protected	4			
USB Charging Port(s)	USB-A x 1, USB-C x 1			
Typical Transfer Time (ms)	4			
Battery				
Runtime at Half Load (min)	6	5		8.5
Runtime at Full Load (min)	1.5	1		2.5
Typical Recharge Time (Hours)	8			
User Replaceable	Yes - Qualified Personnel Only			
Battery Type	Sealed Lead-acid			
Surge Protection & Filtering				
Surge Suppression (Joules)	150			
EMI/RFI Filtration	Yes			
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out			
Management & Communications				
LCD Panel	Yes			
LED Indicators	Power On, Line Mode, Battery Mode, Low Battery			
HID Compliant USB Port(s)	1			
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault			
Power Management Software	PowerPanel Personal (Recommended)			
Physical				
Form Factor	Desktop			
Physical Size - UPS Module				
Dimensions (WxHxD) (mm.)	166 x 118 x 288			
Weight (kg.)	5.5	6.5		8
Environmental				
Operating Temperature (°C)	0 - 40			
Operating Relative Humidity (Non-condensing) (%)	0 - 90			
Online Thermal Dissipation (BTU/hr)	18.2	24.3		23.9
Certifications				
Certifications*	CE, RCM			
RoHS	Yes			

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.